

SUNREY
CHEMICALS

Premium Product Catalogue
Tiling & Grouting Solutions

Chemistry That Builds Trust



ABOUT US

- SUNREY Chemical Company is recognized as one of the leading manufacturers and suppliers of premium construction chemical products in India. Driven by specialized Italian technology frameworks, we deliver world-class structural solutions.
- Our extensive portfolio includes high-performance tile adhesives, advanced stain-free epoxy grouts, block bonding mortars, and heavy-duty maintenance surface cleaners engineered for modern architectural requirements.



INDEX

SR Silver Tile Adhesive	02
SR Gold Tile Adhesive	04
SR Platinum Tile Adhesive	06
SR Diamond Tile Adhesive	08
PU Multipurpose Adhesive	10
Stain-Free Epoxy Grout	14
Polymer Modified Tile Grout	16
High Polymer Grout Admix	18
Heavy Duty Tile Cleaner	20





TILE ADHESIVE

SR SILVER

High polymer modified cement-based tile adhesive suitable for internal wall and floor tiles.





Applications

Interior & Exterior

- Fixing small wall and floor tiles in internal situations.
- Suitable for new flooring and tile-on-tile applications.
- Ideal for interior and exterior ceramic tiles.

Tile Sizes

Up to 800x800 mm

Floor 300x300, 400x400, 600x600,
600x600, 800x800mm

Coverage 4.5–5 m² per 20 kg

Wall 300x300, 300x450, 300x600 mm

Shelf Life 12 months



For Internal
Floor & Wall



No Hollow
Sound



Non-Slip
Adhesive



Ease of
Application



No Cracking
of Tiles



Low VOC




Ideal for fixing tiles on floor & wall

20 Kg Packing

TILE ADHESIVE

SR GOLD



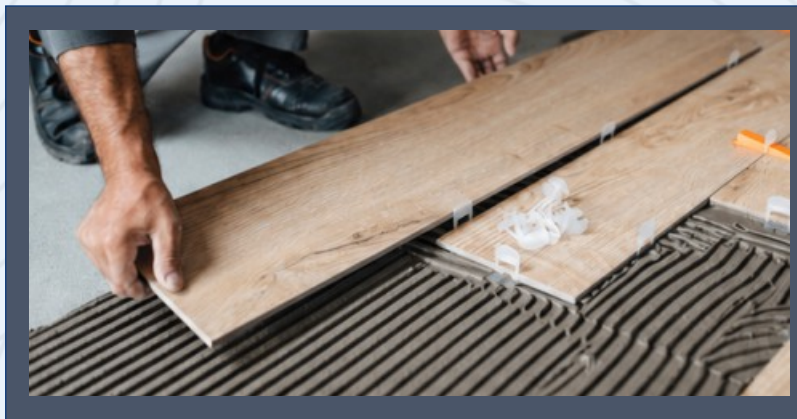

Applications

Interior & Exterior

- Fixing vitrified tiles and porcelain tiles on walls and floors.
- Suitable for tile-on-tile applications in internal situations.

Tile Sizes

Up to 1200x1200 mm

Floor 600x600, 800x800, 600x1200,
800x1600, 1200x1200 mm

Coverage 4.5 to 5 m²per 20 Kg. Bag

Wall 600x600, 600x1200 mm

Shelf Life 12 months



For Internal
Floor & Wall



No Hollow
Sound



Non-Slip
Adhesive



Ease of
Application



No Cracking
of Tiles



Low VOC




Ideal for fixing tiles on floor & wall

20 Kg Packing

TILE ADHESIVE

SR PLATINUM



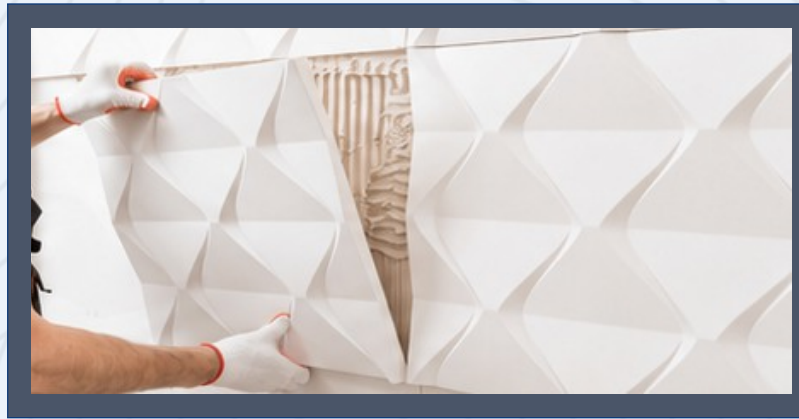

Applications

Interior & Exterior

- Fixing all slab vitrified tiles, mosaic tiles, ceramic, glass mosaic, marble, granite, quartz stone, and terrazzo.
- Applications include swimming pools, window sealing, and marble steps.



Tile Sizes

Up to 1200x1800 mm

Floor 600x1200, 800x1600, 1200x1800

Coverage 4.5 to 5 m²per 20 Kg. Bag

Wall 800x1600, 1200x1200 mm

Shelf Life 12 months



For Internal
Floor & Wall



No Hollow
Sound



Non-Slip
Adhesive



Ease of
Application



No Cracking
of Tiles



Low VOC




Ideal for fixing tiles on floor & wall

20 Kg Packing

TILE ADHESIVE

SR DIAMOND

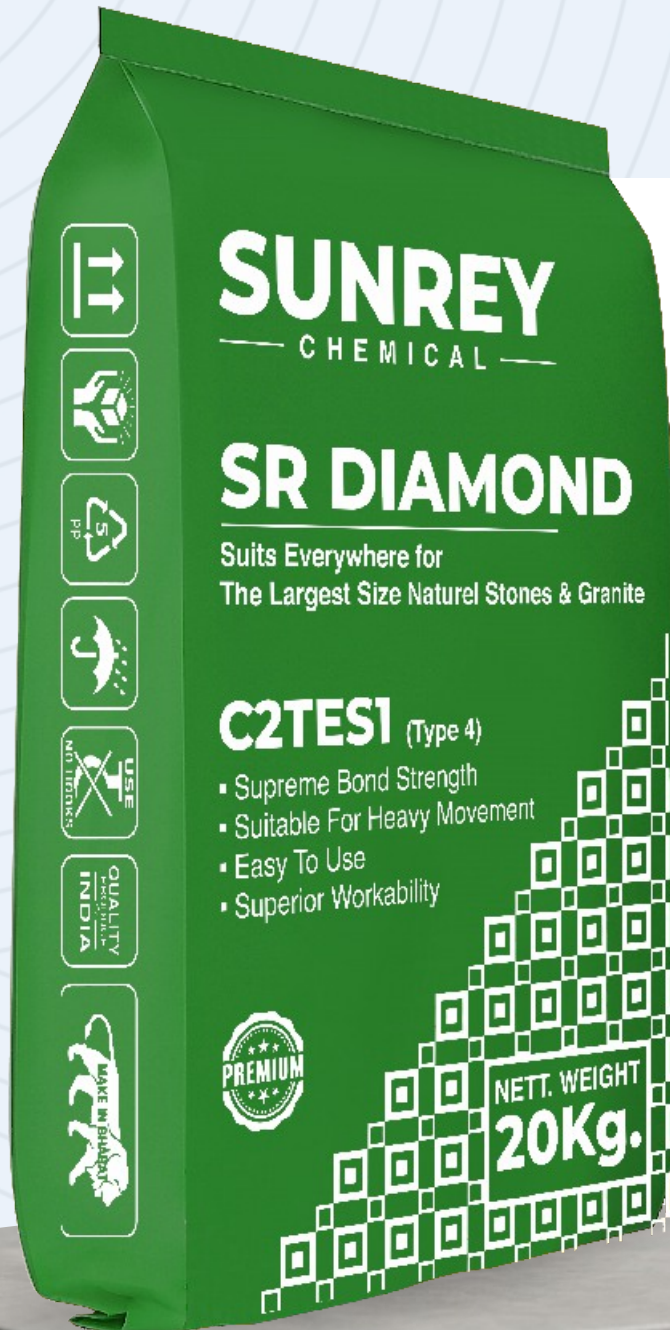



Applications

Interior & Exterior

- Fixing vitrified tiles, porcelain tiles, all vitrified slab tiles, and big size tiles on walls and floors.
- Suitable for difficult and demanding exterior applications.

Tile Sizes

Up to 1600x3200 mm

Floor	800x1600, 1200x1800, 1200x2400, 1600x3200 mm,	Coverage	4.5 to 5 m ² per 20 Kg. Bag
-------	---	----------	--

Wall	800x1600, 800x2400, 1200x1200mm	Shelf Life	12 months
------	---------------------------------	------------	-----------



For Internal
Floor & Wall



No Hollow
Sound



Non-Slip
Adhesive



Ease of
Application



No Cracking
of Tiles



Low VOC




Ideal for fixing tiles on floor & wall

20 Kg Packing

"सतह कोई भी, जोड़ परफेक्ट"

PU ADHESIVE



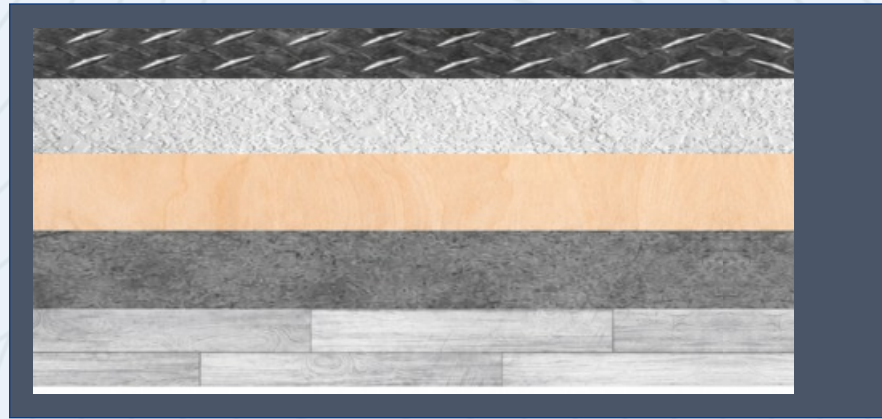

Applications

Interior & Exterior

- Fixing ceramic tiles, natural or artificial stones on diverse surfaces.
- Application on metal, plywood, cement board, glass, and engineered stones.
- Forms a watertight barrier for interior and exterior areas.



Tile Sizes

Up to 1600x3200 mm

Floor	800x1600, 1200x1800, 1200x2400, 1600x3200 mm	Coverage	Approximately 25 sq.ft. @ 3mm thickness using
Wall	800x1600, 800x2400, 1200x1200 mm	Shelf Life	12 months



For Internal
Floor & Wall



No Hollow
Sound



Non-Slip
Adhesive



Ease of
Application



No Cracking
of Tiles




Low VOC

Ideal for fixing tiles on floor & wall

4 Kg Packing

EPOXY GROUT



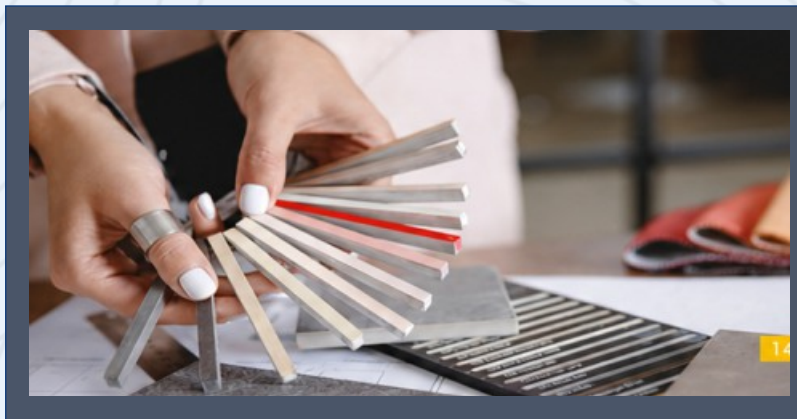

✓ Applications

Interior & Exterior

- Filling tile and stone joints.
- Application in walls, floors, interiors, exteriors, dry and wet areas, work tops, showers, and swimming pools.

Key Features & Benefit

- Stain less and easy to clean, easy to mix and apply.
- Provides excellent chemical resistant property.
- Provides hygienic, hard wearing & impervious properties.
- Non-cracking or powdering.
- Non-Toxic & restricts entry of bacteria / dirt.



For Internal
Floor & Wall



No Hollow
Sound



Non-Slip
Adhesive



Ease of
Application



No Cracking
of Tiles



Low VOC




Ideal for fixing tiles on floor & wall

1 & 5 Kg Packing

TILE GROUT



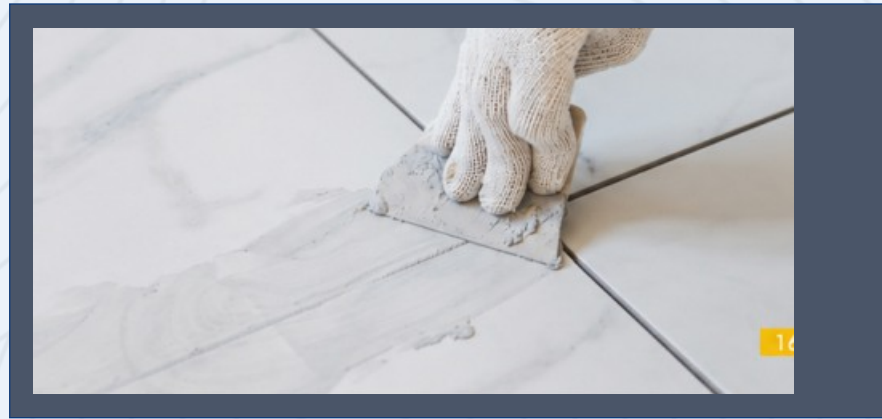

✓ Applications

Interior & Exterior

- Grouting of ceramic tiles, marbles, natural stones, and edges.
- Wet or submerged applications such as swimming pools, bathrooms, toilets, fountains, and kitchen areas.

Key Features & Benefit

- High Compressive, tensile & flexural strength
- Water resistant property
- Easy to use and clean.
- Available in wide range of exciting shades

Self Life & Storage

- Best Before 12 Month from the date of manufacturing in unopened condition.
- Store in a dry & covered place.

 Bright White	 Quarry Red	 Silk	 Midnight Black	 Burgandy
 Sand Stone	 Silver Shadow	 Mocha	 Platinum	 Inca Gold
 Sable	 Slate Grey	 Sapphire	 Dusty Rose	 Hemp
 Smokey Grey	 Aque Blue	 Canyon Red	 IVY	

 Ideal for fixing tiles on floor & wall

1 Kg Packing

GROUT ADMIX





✓ Applications

Interior & Exterior

- To be mixed with sanded and unsanded grout.
- Improves flexibility, compressive strength, shock resistance, and chemical resistance.
- Reduces water absorption and helps maintain color fastness.

Key Features & Benefit

- Colour Fastness
- Flexibility
- Compressive strength
- Shock and chemical resistance
- Reduces water absorption
- Easy to clean



For Internal
Floor & Wall



No Hollow
Sound



Non-Slip
Adhesive



Ease of
Application



No Cracking
of Tiles



Low VOC




Ideal for fixing tiles on floor & wall

200 ml & 400 ml. Packing

प्रीमियम टाइल्स के लिए प्रीमियम क्लीनर TILE CLEANER



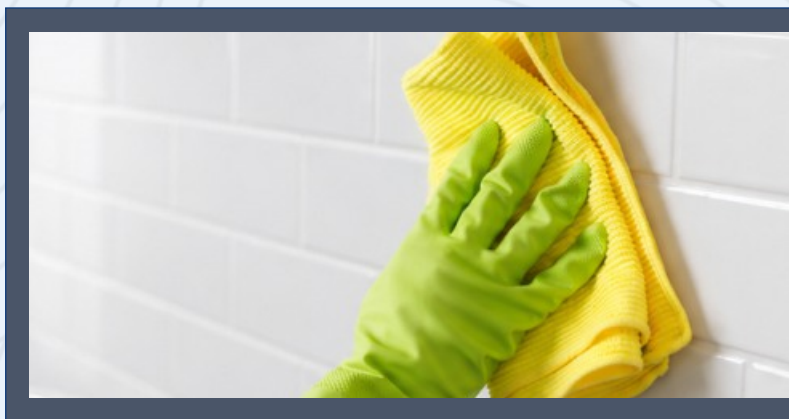

✓ Applications

Interior & Exterior

- Heavy-duty cleaning of ceramic wall and floor tiles.
- Removal of cement film residue, efflorescence, most oxide stains, and lime scale.

Key Features & Benefit

- Powerful formula
- Fast acting
- Easy to apply
- Removes cement film
- Removes residues, Efflorescence and most oxide stains

Note

- Do not use on surfaces that are not resistant to acid such as marble / terrazzo.
- Do not use your bare hand, use hand gloves while using of tiles care, Highly reactive to skin

Coverage

- Varies as per application



Ideal for fixing tiles on floor & wall

1 Ltr. Packing

Direction of Use



1 REMOVE ANY OIL, DUST AND GREASE.

तेल, ग्रीस, और धूल मिटा लें।



2 POUR WATER INTO THE BUCKET.

बाल्टी में पानी डालें।



3 ADD THE POWDER AND MIX.

पाउडर डालें और अच्छे से मिलाएँ।



4 MIX THOROUGHLY PREFERABLY WITH MECHANICAL STIRRER OR MANUALLY.

मशीन द्वारा या हाथ से अच्छी तरह मिलाएँ।



5 APPLY THE ADHESIVE ON THE SURFACE WITH THE SMOOTH PART OF THE TROWEL.

समतल हिस्से से बिपकाने की परत फैलाएँ।



6 SPREAD THE ADHESIVE USING THE TOOTHED PART OF THE TROWEL.

दाँतेदार भाग से बिपकाने की परत को फैलाएँ।



7 AS PER REQUIREMENT DO BACK BUTTERING ON TILE.

जरूरत के अनुसार टाइल के पिछले हिस्से पर बिपकाने की परत लगाएँ।



8 START PLACING THE TILES ON THE SURFACE. TAP THE TILE PROPERLY TO ENSURE COMPLETE COVERAGE ON THE BACK SIDE OF TILES.

टाइल्स को सतह पर लगाएँ। टाइल्स को सही से थपथपाएँ ताकि टाइल्स के पिछले हिस्से पर पूरी बिपकाने की परत लग जाए।



9 REMOVE EXCESS ADHESIVE FROM THE TILE SURFACE.

टाइल की सतह से अतिरिक्त बिपकाने की परत हटा दें।



**WAIT
24 HRS**

GROUT 24 H AFTER FIXING.

स्थापना के 24 घंटे बाद ग्राउट करें।

Precautions & Limitations

Always add powder to liquid and not liquid to powder While working in temperature more than 350C (950F) always dampen the substrate & finish faster Tiling should not be done when surface temperature is below 40C.

Health & Safety Precautions

Protective clothing, such as gloves and goggles, should be worn. Treat any contact to the skin eyes with fresh water immediately. Do not induce vomiting & seek medical Assistance immediately Reseal pack after use and ensure product is stored as instructed..

Shelf Life & Storage

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.



1 Add 3 to 3.5 part of **acecon Grout** to one part of water by volume. **acecon grout** 3 से 3.5 के अनुपात से एक हिस्से पानी में मिलाएँ।



2 Mix to a smooth consistency इच्छानुसार मिलाएँ।



3 Fill the joints by spreading filler paste with rubber trowel in such a way that the entire area of joint gaps are filled. रबर ट्रौयल (फ्लोट) की सहायता से ग्राउट फिलर पेस्ट को फैलाएँ ताकि जोड़ की सभी जगह भर जाए और पूरा क्षेत्र भर जाए।



4 Remove surplus grout with a damp sponge. Allow 24 Hours to dry. अतिविल्ट ग्राउट को नम स्पंज से हटा लें। सूखने के लिए 24 घंटे तक छोड़ दें।

Areas of Application

Tile Grout is used for grouting of ceramic tiles, marbles, natural stones and edges.

- Specially formulated for wet or submerged grouting applications such as swimming pool, bathrooms, toilets, fountains and kitchen areas.
- It can be used for external and internal areas.
- It is used in residential and commercial areas.
- Application up to joint width of 2-4mm.
- It is excellent for highly glazed tiles to give a smooth and watertight joints which when set will be both water and mould resistant.

Method of Application

1 Surface Preparation

- Surface must be cleaned and should be free from dirt, cured tile adhesive. Remove dust with wire brush & by air blower.
- For exterior grouting application, wet the tiles prior to applying **acecon Tile Grout**.

2 Mixing

- Add the grout powder to the mixing **acecon Grout Hardner** (w/p ratio – 1 : 2.5 by volume) and mix with slow speed drill (250-300 rpm) to a soft & smooth consistency paste.
- If the grout mortar has become too stiff to work, it should be discarded and a new batch should be prepared.

3 Application

- Apply to the tile joints with squeegee, spatula or putty blade. After application flush the surface of tile using a hard rubber float, working diagonally across the grout joints to fill and compact the joints. All excess grout should be removed with the same rubber float without any delay.
- Lesser the quantity of grout left on the face of the tiles while application, the final cleaning will be easier, with **acecon Tile Cleaner**
- However, It is important to allow the grout to set in the joint and to let it acquire its initial set before any further cleaning. After the initial set of the grout, clean the tile surface with a pad of cheesecloth or towel dampened with minimum quantity of clean and cool water. Rub in a circular motion to further compact the grout liine.
- The remaining surface grout on the tile can also be cleaned at this time. Scrubbing pad fastened to a float works very well to remove grout from the porous tiles.
- Rebuff the tile surface and grout within 1-2 hours to remove all weep water and grout residue from the surface, which helps to reduce the efflorescence and to control colour variation.

TILE FIXING TOOLS



TILE SPACER

Use To Fix Tiles With Proper Space

Size : 2mm, 3mm, 4mm, 5mm, 6mm, 8mm, 10mm

Color : White, Yellow

Packing : 100pcs



TILE LEVELING KIT

Use To

Fix Tiles With Proper Level



CLIP

Size : 1mm, 1.5mm, 2mm,

2.5mm, 3mm, 4mm

Color : White | Packing : 50pcs



VAGES

Color : Blue, Yellow, Red

Packing : 50pcs



TILE JACK

Use To Fix Tiles Height & Level

Color : Blue, Yellow, Red

Packing : 50pcs



TILE SPINNER LEVELING KIT

Use To Fix Tiles With Proper Level



CLIP

Size : 1mm, 1.5mm, 2mm,

2.5mm, 3mm, 4mm

Color : White | Packing : 50pcs



SPINNER

Color : Blue, Yellow, Red

Packing : 50pcs



METAL TROWEL

To Ensure an Even Layer of Adhesive



PLASTIC TROWEL

To Ensure an Even Layer of Adhesive

- 👤 Hiren Soriya : +91 87809 12538
- 👤 Harsh Bhoraniya : +91 99042 44055
- 📍 Morbi 363642 (Guj.)
INDIA